


### Vision™ Monitor™




Patent Pending The Vision™ Monitor™ uses best managements practices for treating drinking water for contaminants such as arsenic, uranium, V.O.C.'s, and radium, and integrates twin tanks, water sample ports and meter control into one system.



**The Vision™ Monitor™ features:**

- Twin tank back up protection
- Water Use Alarm
- Sample Valves

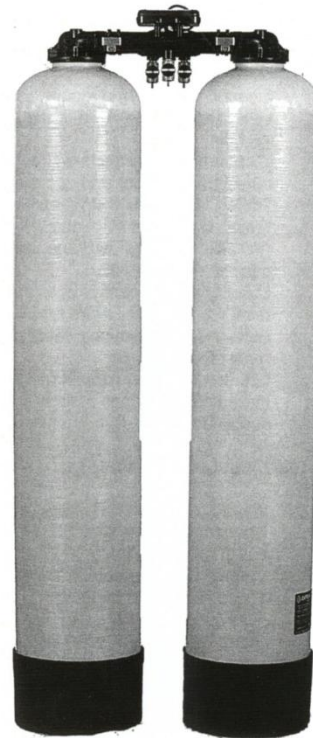

**Packaged with meter control (Part Number BUB080) which can be used for a water use alarm, flow switch, air pump, and feed pump operation\* with the following features:**

- Displayed real time flow rate, GPM
- Total accumulated flow, Gallons
- Records peak flow, GPM Peak
- Power On Green Light
- Adjustable threshold gallons prompt
- 80% Threshold Amber Light
- 90% Threshold Red Light
- 100% Threshold flashing Red Light
- 100% Threshold Audible alarm
- 100% Threshold 12 V AC Output
- Set Volume/Set Time 12 V AC Output
- Flow Switch 12 V AC Output
- Adjustable 4-20 mA output flow rate signal
- 1-15 GPM +/- 5%
- Easy touch programming
- Vortec Turbine Meter
- Glass Reinforced Polymer Housing

\*For use with many different treatment medias, contact us for application engineering

Specifications	Model #			
	Monitor 10V	Monitor 15V	Monitor 20V	Monitor 25V
Media	Selection per application			
Tank Size, In.	9x48	10x54	12x52	13x54
Overall Height, In.	52	58	56	58
Inlet Height, In.	50	56	54	56
Pipe Size In/Out***	1" FNPT	1" FNPT	1" FNPT	1" FNPT
Peak Flow, GPM	**	**	**	**
Shipping Weight, lbs.	105	155	205	255
Mineral Volume, Cubic Feet Per Tank	1	1.5	2	2.5

\*\* Selection per application, manifold and tank heads only is 15 GPM at 8 PSI pressure drop

\*\*\*1" stainless steel bypass standard